

ANDRIS LUX ELECTRIC STORAGE WATER HEATER

HOT WATER | HEATING | RENEWABLES ariston.com/uk

ANDRIS LUX FEATURES AND BENEFITS



The Andris Lux is a market-leading unvented electric water heater, offering superb hot water performance from a cutting-edge, compact, Italian design. Convenient and easy to install, the unit combines energy efficiency, durability, usability and safety. It is available in 8 models including 6, 10, 15 and 30 litre variants, as well as undersink and oversink versions.

- / Easy to operate with mechanical dial
- / 'E' setting on the dial to optimise comfort and energy saving
- / Copper heating element (Nickel free)
- / Heating lamp to show the heating cycle is in process / Fast reheat times
- / Installation in 10 easy steps




UP TO

Α

TITANIUM ENAMELLED



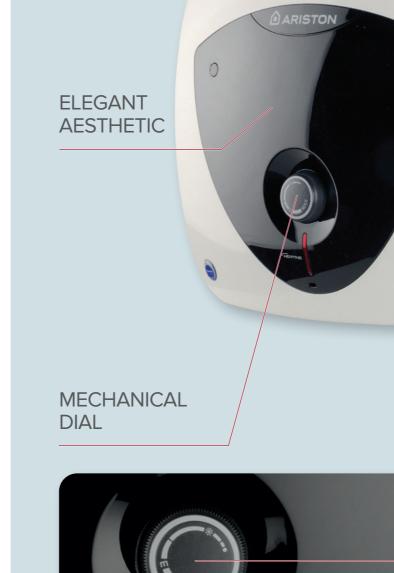

HEATING



TITANIUM ENAMELLED TANK

/ With its proprietary titanium tank engineering, the Andris Lux boasts exceptional durability and an extended product life.



ITALIAN DESIGN

Designed by Umberto Palermo, the Andris Lux's modern, elegant and cutting edge new design offers a sophisticated look and easy installation.




EASY TEMPERATURE REGULATION

A regulation knob allows the temperature to be set according to a user's comfort. The 'E' setting optimises energy saving.



ENHANCED ANTI-CORROSION With its robust 4 bolt flange and copper

heating element, the Andris Lux Eco offers improved protection against water corrosion.





ANDRIS LUX ELECTRIC WATER HEATER

COPPER HEATING ELEMENT




TOP OR BOTTOM CONNECTIONS

1. Temperature regulation dial, with 'E' positioning for optimisation of comfort and energy saving (Economy setting).

2. Heating lamp shows that the heating cycle is in progress.

PRODUCT DIMENSIONS



	6L (Undersink) 1.5kW	10L (Under & Oversink) 2kW & 3kW	15L (Under & Oversink) 2kW & 3kW	30L (Oversink) 3kW
А	315mm	360mm	360mm	447mm
В	315mm	360mm	360mm	447mm
С	250mm	298mm	346mm	410mm
D	330mm	385mm	385mm	476mm

LEGEND

Cold water inlet G 1/2" O Hot water outlet G 1/2"

	ANDRIS LUX								
Description		10 O 3kW			15 O 3kW			30 O 3kW	
Туре	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented	
Capacity (Litres)		10	10	10				30	
Installation	Undersink	Oversink	Undersink	Undersink	Oversink	Undersink	Undersink	Oversink	
ErP Class								С	
Element Rating (kW)	1.5								
Tapping Profile	XXS	XXS	XXS	XXS	XXS	XXS	XXS		
Heating Time (min)		12	17	12		26		30	
Unit Weight (kg)	5.1	6.7	6.7	6.7	7.5	7.5	7.5	11.2	
Standing Loss (kWh/24h)	0.42	0.46	0.71	0.71	0.61	0.85	0.85	0.75	
PRODUCT CODES	3626292	3100302					3100309	3820017	
								Including kits	

INSTALLATION KITS:

IN ORDER TO FIT AN ARISTON ANDRIS LUX, IT IS GOOD PRACTICE AND SOMETIMES MANDATORY TO INSTALL ONE OR SEVERAL OF THE FOLLOWING KITS:



KIT A Expansion Vessel & Non-return Valve The expansion vessel prevents any build-up of pressure within the domestic hot water system, while the non-return valve stops any backflow of hot water into the cold water main.

PRODUCT CODE: 406801



KIT B 3.5 Bar Pressure Reducing Valve The maximum cold water inlet pressure designed for the Andris unit is 3.5 bar. Therefore, this pressure reducing valve controls the water to not exceed this limit.

PRODUCT CODE: 406802

KIT C

Discharge Tundish In the event the hot water system over pressurises, water is discharged via the 6 bar pressure relief valve and the tundish visually indicates a discharge is occuring.

PRODUCT CODE: 406807

HOT WATER | HEATING | RENEWABLES

Customer Service: customer.service.uk@aristonthermo.com | 0333 240 8777 Sales: salesoffice@aristonthermo.com | 0333 240 6666

ariston.com/uk



