


GALA NG45 230 V /










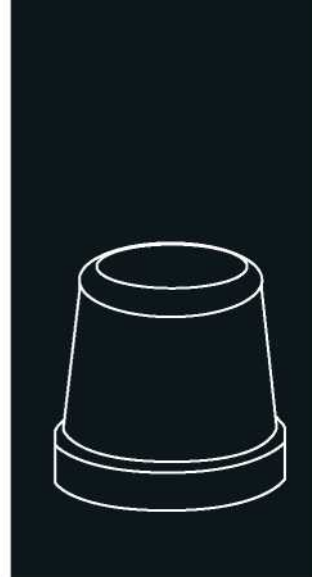

50 Hz
SAMOSTALNI APARAT ZA PRAVLJENJE LEDA

ZNAČAJKE

- PROIZVODI ČVRSTE JESTIVE KRISTALNO PROZIRNE KOCKICE LEDA

- ELEKTRONSKA KONTROLA KOJA UNAPREĐUJE PERFORMANSE STROJA I OMOGUĆAVA MU PRILAGOĐAVANJE EKSTREMNIM KLIMAMA
- A3S: SPREJ SUSTAV PROTIV KAMENCA. ITV PATENTIRANI SPREJ SUSTAV S FLEKSIBILNIM MLAZNICAMA SPRJEČAVA NASTANAK NASLAGA KAMECA, UZ MALE VIBRACIJE
- PAMETNI PREDNJI VENTILACIJSKI SUSTAV (SFVS) OMOGUĆUJE UGRADNJU UGRADNJE JEDINICA
- PREKIDAČ ZA ČIŠĆENJE: ISKLJUČUJE SUSTAV HLAĐENJA DOK CIRKULIRA VODU S PROIZVODOM ZA ODSTVARANJE KAMENCA (CALKLIN ILI SLIČNO)
- "NEVER STOP" MOTORNA CRPKA KOJU JE RAZVIO ITV. NJEN DIZAJN BEZ BRTVI SPRIJEČAVA DETERIORACIJU U TEŠKOJ VODI
- EASI: JEDNOSTAVAN PRISTUP ZA SERVIS I UGRADNJU (EASY ACCESS FOR SERVICE & INSTALLATION). SVE PLOČE MOGU SE RASTAVLJATI ODVOJENO
- ON/OFF OSVJETLJENI PREKIDAČ / PCB POSTAVLJEN NA DNU
- TROPIKALIZIRANI STROJEVI (T KLASA) / NOGARE PODESIVE VISINE OD 105MM DO 155MM
- PRIRODNI PLIN R290 S VRLO NISKIM POTENCIJALOM GLOBALNOG ZATOPLJANJA KOJI TAKOĐER SMANJUJE POTROŠNJU ENERGIJE
- STIF: ČVRSTA INOX IZRADA. ČVRSTA KONSTRUKCIJA PODRŽANA U 4 ČELIČNA STUPCA. TIJELO OD NEHRĐAJUČEG ČELIKA AISI 304.
- NAJJAČI SUSTAV OTVARANJA VRATA PATENTIRAN OD ITV-a. VRATA OD INOX AISI 304



	 24 H	 10°C (Kg)	 10°C (Kg)	 21°C (Kg)	 15°C (Kg)	 STOCK (Kg)	 (mm)	 (mm)	
GALA NG45 A		47	48	20	Širina 465 Dubina 595 Visina 789*	Širina 540 Dubina 660 Visina 920	GALA 22gr 35 (Ø) x 35 mm (H) Prosječne dimenzije		
GALA NG45 W		49	47						

* S NOGARAMA 894/944 894/944

OPREMA

UKLJUČENA



CRIJEVO ZA DOVOD VODE



CRIJEVO ZA IZLAZ VODE



KOMPLET ZA PODESIVU VISINU NOGARE



BRTVA FILTERA ZA ULAZNU VODU



SREDNJA LOPATICA

NIJE UKLJUČENA (OPCIONALNA)



FILTER PROTIV KAMENCA



FILTER CS 101 PROTIV KAMENCA I KLORA



FILTER PROTIV ČESTICA



C4 OMEKŠIVAČ VODE



CALKLIN 50 SREDSTVO ZA ČIŠĆENJE




OPREMA ZA 4 KOTAČA

TEHNIČKA SHEMA


GALA NG45




POGLED S LIJEVE STRANE

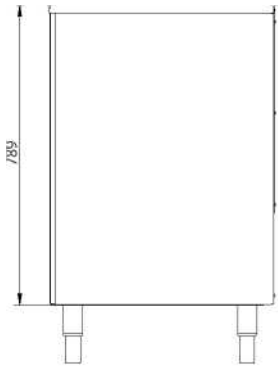


POGLED SPRIJEDA

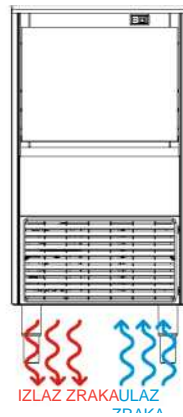

POGLED STRAGA

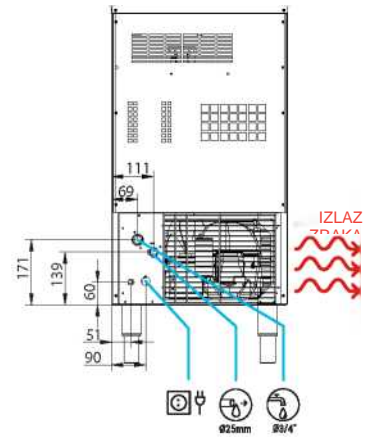

POGLED S VRHA



* Sva mjerenja su u mm.

RADNI UVJETI

PROIZVODNJA 50Hz

- ±10% V
- 10°C/43°C
- 5°C/38°C
- 1 bar/6 bar
- 24 Ice
- kockica/ciklusa

	V	Hz	ph
	230	50	1N

GALA NG45 HLADENO ZRAKOM

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	47	50	44	41
50°	47	48	47	45
21°				
68°				
32°	45	44	43	40
90°				
43°	36	34	32	28
109°				

GALA NG45 HLADENO VODOM

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	49	48	47	45
50°	49	48	47	45
21°				
68°	48	47	46	44
32°	46	45	44	40
90°				
43°	45	44	40	38
109°				

MODELI

	(W)	(BTu/h)	(W) 43°C	(n.)	(mm ²)	FUSE	(Kwh)	(l/h)	(W)	(BTu/h)	(Kg)	(Kg)	(m ³)
GALA NG45 A	1.386	4.729	510	3	1,5	10	26	5,3	1.025	3.497	45	56	0,33
GALA NG45 W	1.386	4.729	430	3	1,5	10	23,8	44,3	1.025	3.497	45	56	0,33



ITV ICE MAKERS, S.L.
POL. IND. SECTOR 13, AVDA. DELS HOSTALERS, 2
46394 RIBARROJA DE TURIA, VALENCIA, SPAIN
PHONE: +34 96 166 75 75 | FAX: +34 96 166 81 00
info@itv.es | www.itv.es



SERVIS
SERVICIO ASISTENCIA TÉCNICA
service@itv.es
Skype: ITV.Service
+34 961 667 639
8:00AM | 7:00PM

2 godine jamstva

Podložno određenim ograničenjima
i izuzecima. Samo rezervni dijelovi.



9000
9001
14000

